Main Data:

Fixture Model	Input Voltage	LED Driver Model	System Wattage	Dimensions	Power Factor
MHTL-CUBE-35E	120-277VAC 50/60Hz	EUC-036S140ST	35W	42”x3.5”x3.5”	>0.99

Warnings:

- The Luminaire shall be installed in the area with good ventilation, no corrosive gas and no combustible and explosive objects.
- The supply voltage is allowed to be varied from 110-277V. It will influence the normal start and operation of the lamp, also damage the ballast if the input voltage exceeds this range.
- Maintenance can only be performed after the power is off.
- The product shall be installed and serviced by a competent and certified electrician.
- The Luminaire shall be grounded reliably to avoid accidental power leakage and electric shock.

Installation Instruction:

Suspended (Standard)

1. The two mounting points on the fixture are 26” away. Place marks on the ceiling.
2. Attach two anchors to the ceiling. (Spacing as indicated above)
3. Screw in two metal bases to anchors.
4. Screw in one aircraft cable connector on the top side of the fixture.
5. Screw in the adjustable end of aircraft cable to the metal bases that are already mounted on the ceiling.
6. Adjust aircraft cable for desired mounting height and connect power source to the fixture.

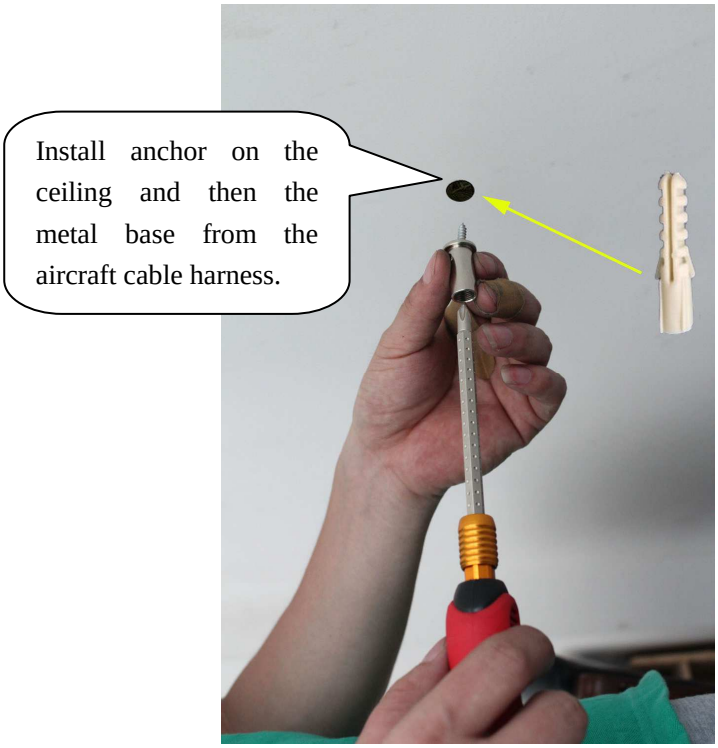

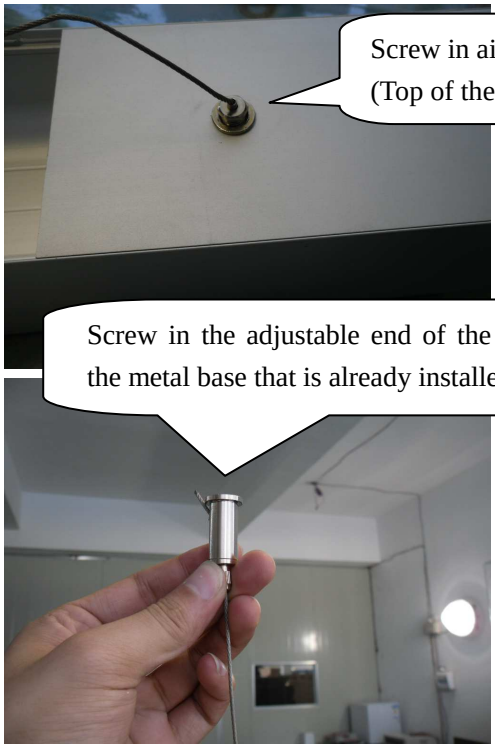
Screw in aircraft cable (Top of the fixture)
Screw in the adjustable end of the aircraft cable to the metal base that is already installed on the ceiling.

Horizontal and Vertical Wall Mount (Option)

1. Two “L” Brackets will be provided for both horizontal and vertical wall mount.
2. The two mounting points on the fixture are 26” away. Place marks on the wall for horizontal mounting. For vertical mount, measure the ends of the fixture and mark the wall.
3. Install both “L” Brackets using provided wall anchors and counter sink screws.
4. Connect power source to the fixture.
5. Install the fixture on both “L” Brackets using provided screws.

Horizontal Wall Mount

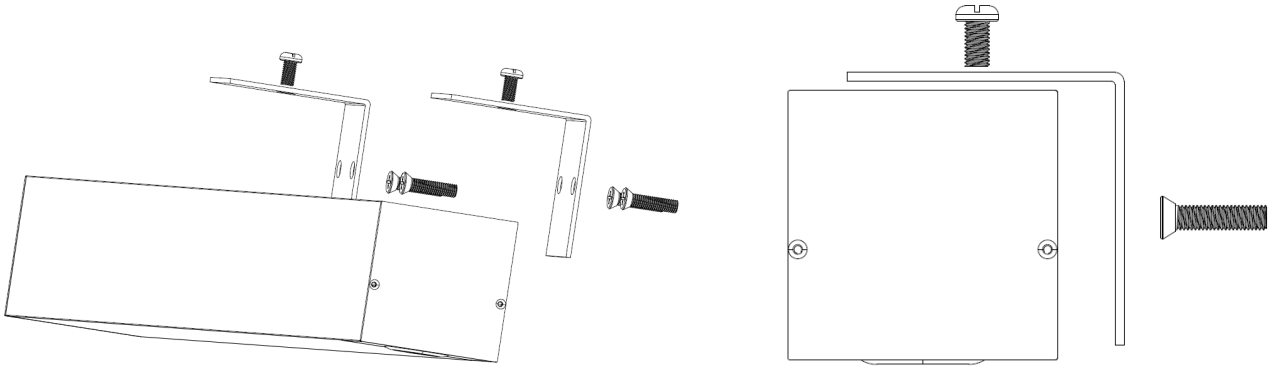

Vertical Wall Mount

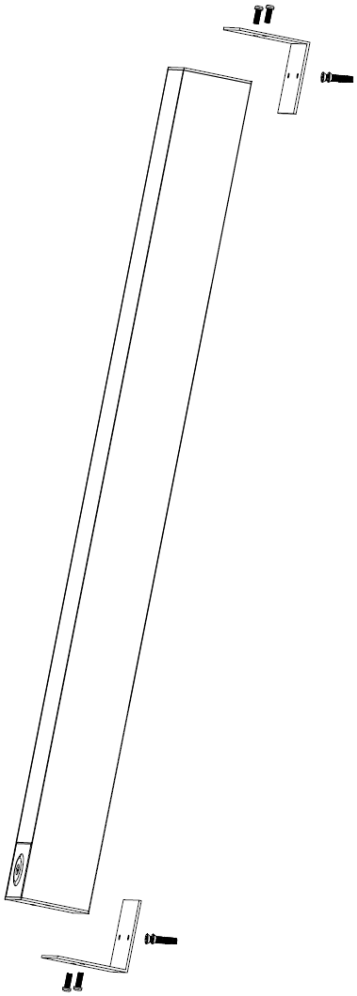

Ceiling Surface Mount (Option)

1. Two Surface Mount brackets and screws will be provided.
2. The two mounting points on the fixture are 26” away. Place marks on the ceiling.
3. Install both brackets (Please use appropriate hardware for concrete or dry wall ceiling).
4. Connect power source to the fixture.
5. Install two provided screws on top of the fixture. Adjust to the desired height and slide into the brackets on the ceiling.

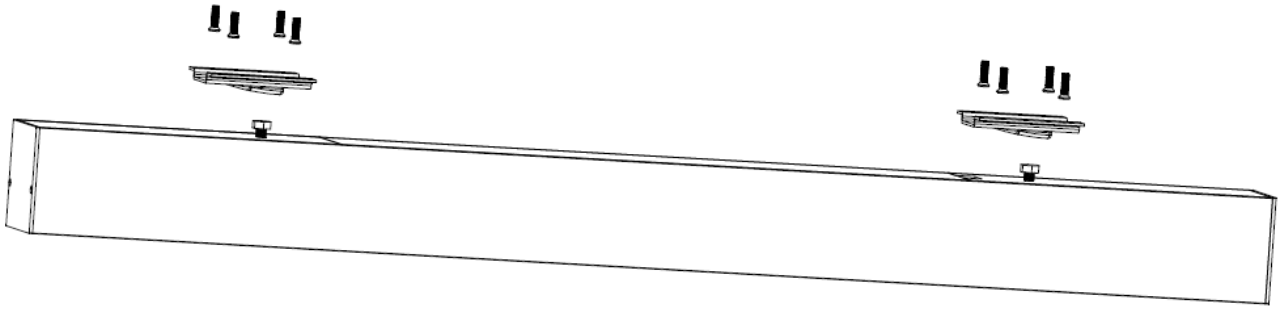

Suspended Continuous (Option)

1. Custom plate to connect two fixtures will be provided. Slide in between two fixtures.
2. Please refer to Standard Suspended Mount.